



RT35/RT40



RT35/RT40 PRODUCT GUIDE

Complies with ANSI B30.5

Rough Terrain Crane

35 metric ton (40 U.S. ton) capacity
31 m (101.7') main boom
9 m - 14 m (29.5' - 46') jib



RT35/RT40

CONTENTS

2 FEATURES

3 KEY / SYMBOLS

4-6 TECHNICAL DESCRIPTION

7 CRANE AND COMPONENT WEIGHTS


8 CRANE DIMENSIONS

9 WORKING RANGE DIAGRAM





10-21 LOAD CHARTS





KESSLER•CO **AxleTech**
International

















 AxleTech International KESSLER-CO						



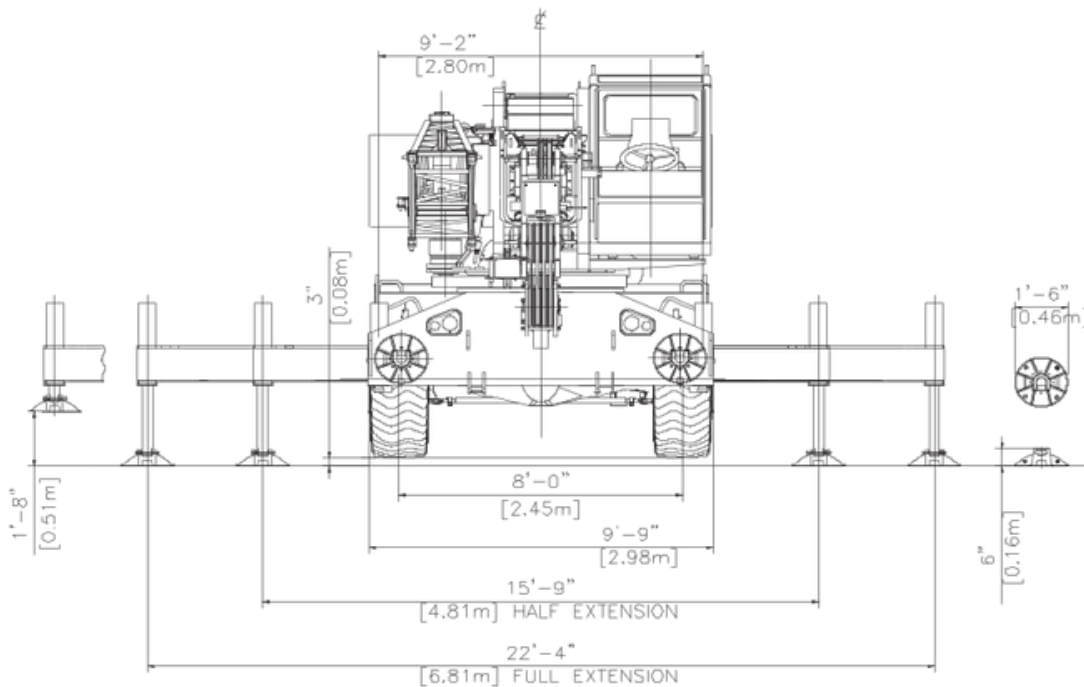

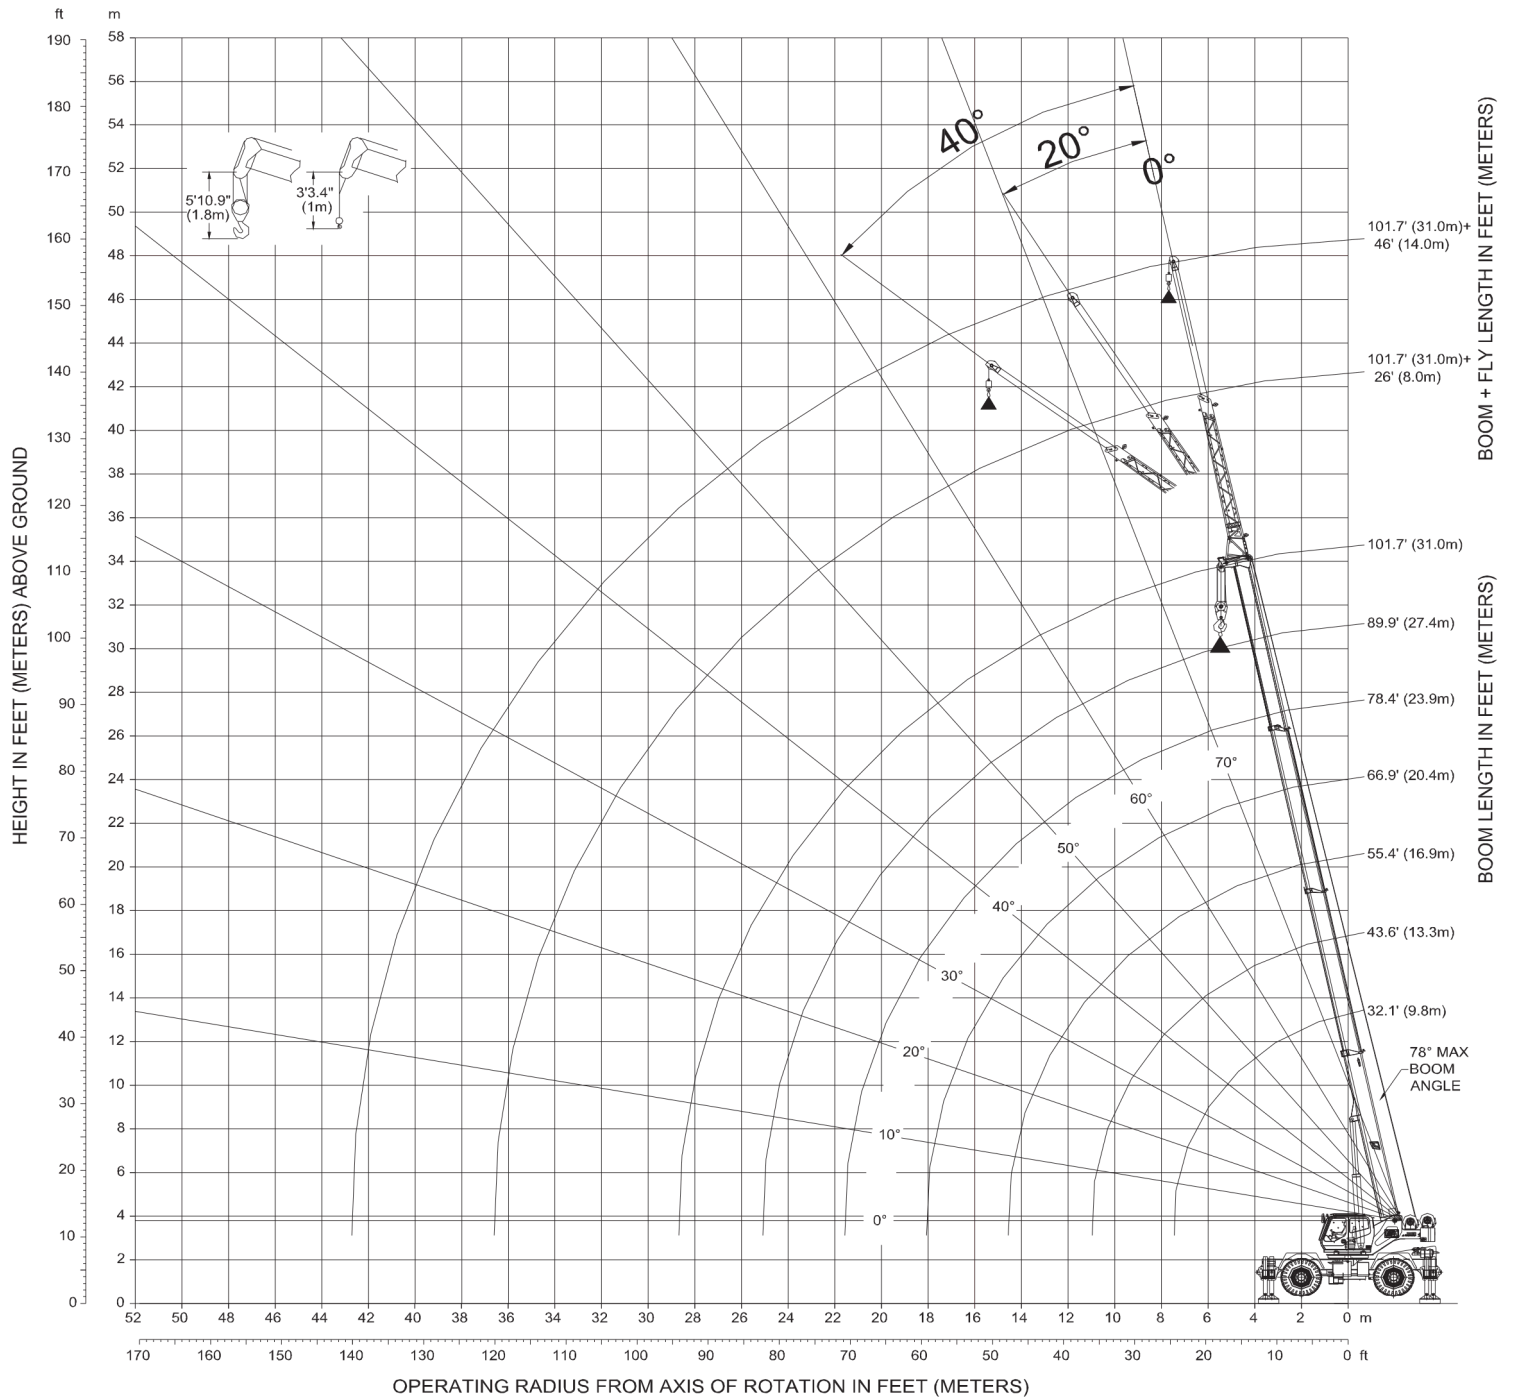



[illegible]

A blue notepad with a silver clip at the top left and horizontal ruling lines. The notepad is oriented vertically and features a solid blue cover. A silver clip is attached to the top left corner. The notepad is open, showing a white page with horizontal ruling lines. The lines are light blue and evenly spaced. The notepad is set against a white background.[illegible]

[illegible]

[illegible]



[illegible]

[illegible]

A blue notepad with a silver clip at the top left. The notepad has a white header section and a body with alternating light blue and white horizontal stripes.

[illegible]

[illegible]